Raccordements ***Ports***	raccords instantanés pour tube Ø4 ***Ø4 push-in fittings***
Pression de travail ***Working pressure***	3 ... 10 bar ***0.3 ... 1 MPa***
Intervalle de temps de régulation ***Time regulation range***	0...15 s
Température de travail ***Temperature range***	max +60°C
Fluide ***Fluid***	air filtré 50µ avec ou sans lubrification ***50µ filtered lubricated or non lubricated air***

Matériaux
Corps : Aluminium anodisé
Ressorts : Inox
Joints : NBR
Parties internes : Laiton OT58

Materials
Body : Aluminium 11S
Springs : Stainless steel
Seals : NBR
Internal parts : Brass OT58

Fonctionnement


Il s'agit d'un dispositif qui, alimenté en **1**, fournit en sortie des impulsions pneumatiques de fréquence réglable. Leur fréquence se règle au moyen de la vis de régulation **R**.
Pour un fonctionnement correct, il est nécessaire que la pression d'alimentation soit supérieure ou égale à 3 bar ; en dessous de cette valeur le dispositif peut se bloquer.


Valve operation

It is a device which, when air is present at port 1, gives as output implse with variabble frequency. The frequency can be regulated by the screw R.
For the correct operation the minimum main pressure must be 3 bar, otherwise the valve can get blocked.


AX.007.4

Mini-oscillateur 3/2 G1/8”
Mini oscillating valve 3/2 G1/8”
Version Atex 2GD T6 : AX.007.4.ATEX







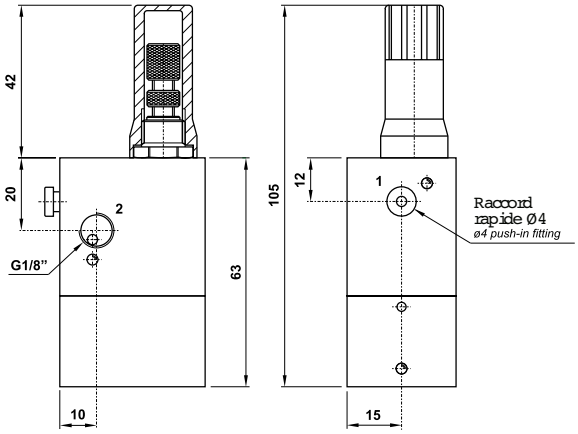

9

Les informations sont données à titre indicatif et sous réserve de modifications éventuelles. Photos non contractuelles.